

# INSIGHT SPOT

SYSTEM INSIGHT




**Application:** offices, shops, entrance lobbies, apartments

**Housing:** cast aluminum

**Power Supply:** electronic, 48V, to be ordered separately



**Other:** input voltage - 48V DC



## TECHNICAL DATA

Luminaire power	4 - 21 [W]
Luminaire luminous flux	160 - 1800 [lm]
Type of diffuser/plate	Lens
Distribution angle	27°, 34°, 37°
Color temperature	3000 K, 4000 K
Color rendering index	80
Lifetime Lxx Bxx	L70B50@60.000h
Length L	48, 60, 90, 140 mm
Diameter D	22, 30, 52 mm
The color of the housing	White RAL9016, Black RAL9005, Black RAL9005/ White RAL9016
IP	IP20
Type of control	ON/OFF, DALI
Supply voltage	48V DC

[mm]

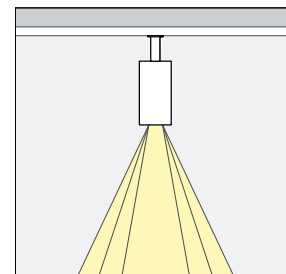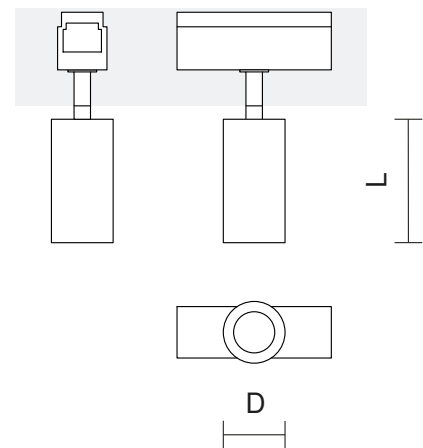

The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.

# INSIGHT SPOT

SYSTEM INSIGHT



## Realizations



The dimensions and technical information provided are for reference only. Actual data may slightly differ due to the manufacturing process. Spectra Lighting reserves the right to change the presented materials and technical parameters of products without prior notice. The photos show an illustrative representation of products and colors. The finish, color and appearance of the optics depend on the choice of the luminaire and may be different than shown in the photo.